



# MEAX-3L-SMA

Cellular/LTE Connector Mount  
Part #: 100-00166-01



## Description

The MEA-3L-SMA is an external narrowband antenna designed for cellular/LTE frequencies (698-960 MHz - 1710-2170 MHz). The antenna provides exceptional pattern control, polarization purity and high efficiency. The MEA-3L-SMA is available in two configurations: a straight, and right angle SMA-Male connector. Featuring a rugged housing allows the antenna to be considered for various demanding installations. MEA-3L-SMA provides outstanding performance for NB-IoT applications.

## Electrical Specifications

Parameter	Specification	
Frequency Range	698-960 MHz	1710-2170 MHz
Band	700/850/900 MHz	1700/1800/1900/2100 MHz
Return Loss	-5 dB	-9 dB
VSWR	3.9:1	2.7:1
Efficiency	62.4%	62.4%
Peak Gain	1.5 dBi	3.5 dBi
Average Gain	-2.1 dB	-2.1 dB
Impedance	50 Ω	
Polarisation	Linear	
Radiation Pattern	Omni-Directional	
Max. Input Power	25 W	

## Mechanical Specification

Parameter	Specification
Antenna Dimensions	Ø 9 x 38 mm
Operating Temperature	-40°C to 85°C
Connector Type	SMA-Male Standard
Mounting Type	Connector Mount
Radome	TPC-ET
Radome color	Black
Substance Compliance	RoHS





\*Mounted on Ground Plane of 115x45 mm

## Features

- CELLULAR / LTE frequency
- Connector Mount
- Low Profile
- Wide band Antenna
- Dimensions 48 x Ø 9 mm
- Easy integration
- High performance



## Applications

- Public transportation
- Video transmission
- IoT
- Fleet Management
- Gateway/ Routers
- Public transportation
- Autonomous cars

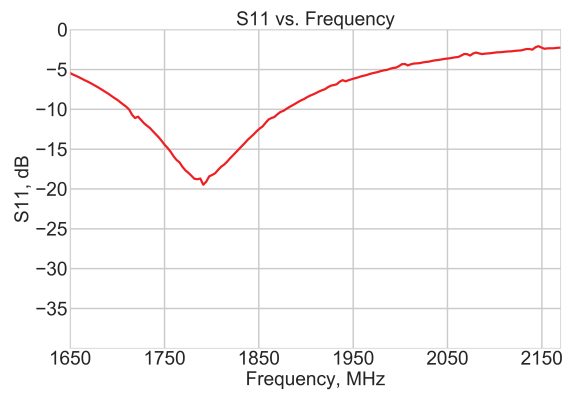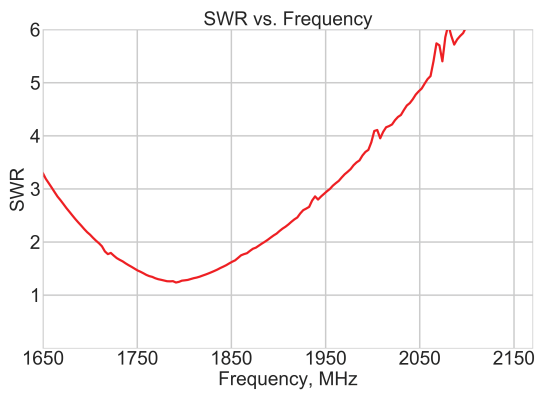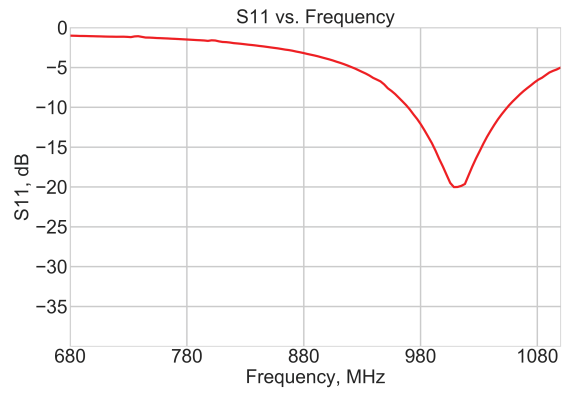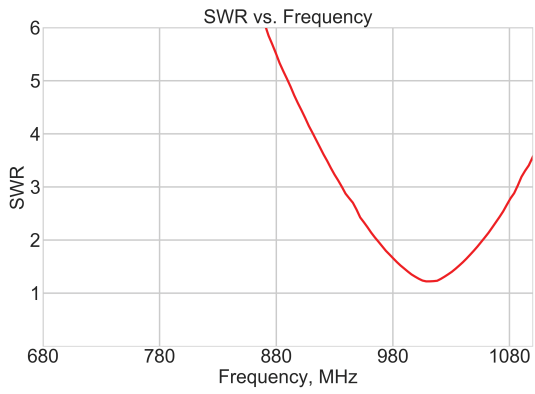

Maxtena Inc.  
 7361 Calhoun Place, Suite 102  
 Rockville, MD 20855  
 1-877-629-8362  
 info@maxtena.com  
 www.maxtena.com

DRAWING REVISION HISTORY			
REV	DESCRIPTION	DATE	BY
A	INITIAL RELEASE	2021-07-26	SZ

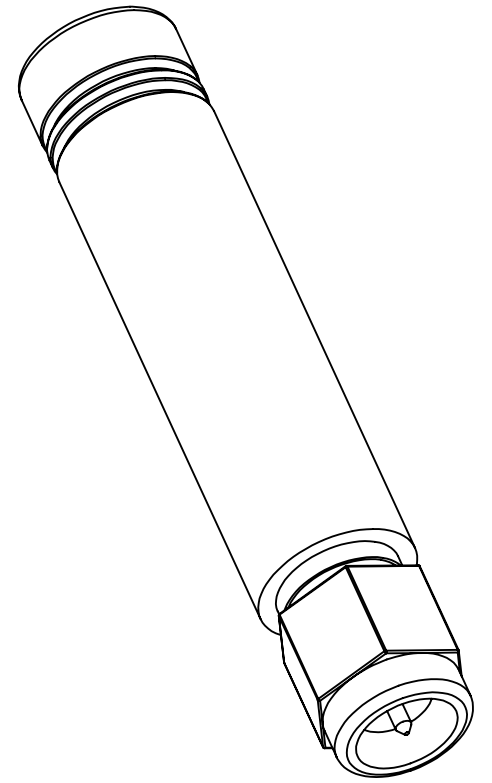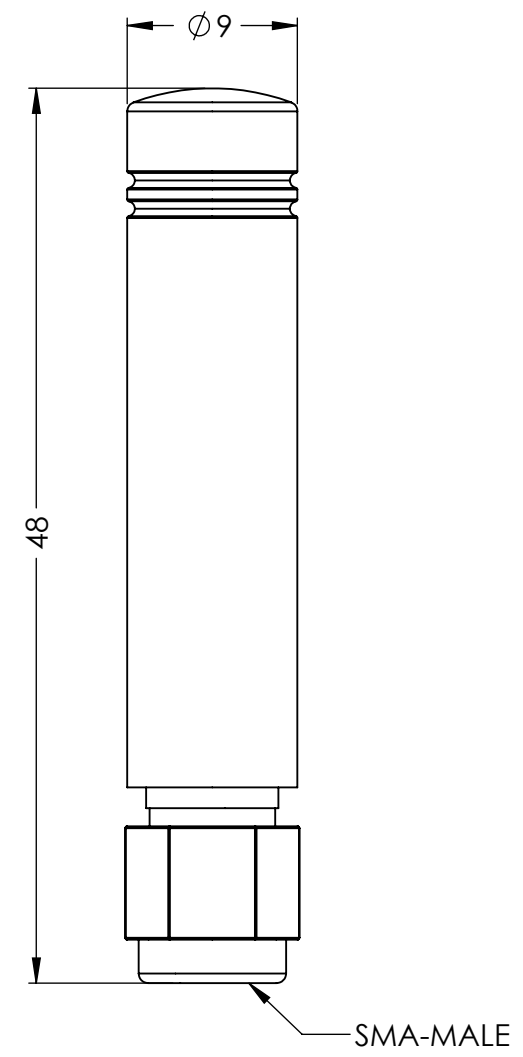

NOTES:

1. FREQUENCY:
  - CELLULAR: 698-960 MHz
  - LTE(NB-IoT): 1710-2170 MHz
2. MOUNTING TYPE: CONNECTOR MOUNT
3. MATERIALS:
  - RADOME: TPC-ET
  - RADOME COLOR: BLACK
4. OPERATING TEMPERATURE: -40 °C ~ +85 °C
5. STORAGE TEMPERATURE: -40 °C ~ +85 °C

UNLESS OTHERWISE SPECIFIED:	NAME	DATE
DIMENSIONS ARE IN MM	DRAWN	SZ 2021-07-26
TOLERANCES:	CHECKED	ZX 2021-07-26
FRACTIONAL: ±	ENG APPR.	NPC 2021-07-26
ANGULAR: MACH ± .5° BEND ±	MFG APPR.	
INTEGER ± 2	Q.A.	
ONE PLACE DECIMAL ± 1.0		
TWO PLACE DECIMAL ± .50		
INTERPRET GEOMETRIC TOLERANCING PER:		
	CAD MAINTAINED. CHANGES SHALL BE INCORPORATED BY THE DESIGN ACTIVITY.	
THIRD ANGLE PROJECTION		
DO NOT SCALE DRAWING		

MAXTENA, INC		
TITLE: 100-00166 MEA-3L-SMA		
SIZE <b>B</b>	DWG. NO. <b>117-00422-01</b>	REV <b>A</b>
CAGE CODE: 5KQH7	SCALE: NONE	SHEET 1 OF 1

ITEM 100-00166 REVISION HISTORY			
REV	DESCRIPTION	DATE	BY
A	INITIAL RELEASE	2021-07-26	SZ

100-00166 CONFIGURATION TABLE	
DASH NO	CONNECTOR TYPE
-01	SMA-MALE

PROPRIETARY AND CONFIDENTIAL  
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MAXTENA, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MAXTENA, INC IS PROHIBITED.

8 7 6 5 4 3 2 1

D  
C  
B  
A

D  
C  
B  
A

8 7 6 5 4 3 2 1