
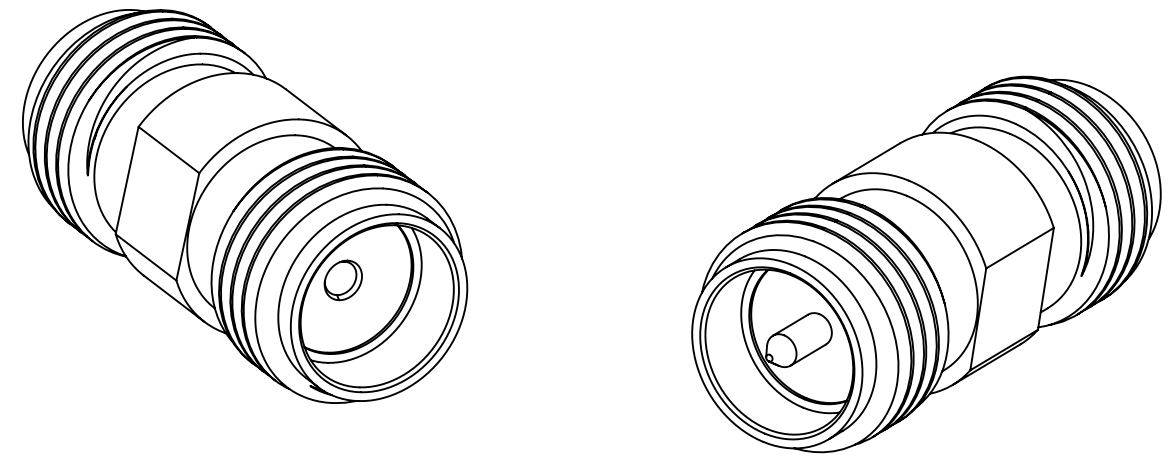


DRAWING REVISION HISTORY			
REV	DESCRIPTION	DATE	BY
A	INITIAL RELEASE	2024-04-26	MP

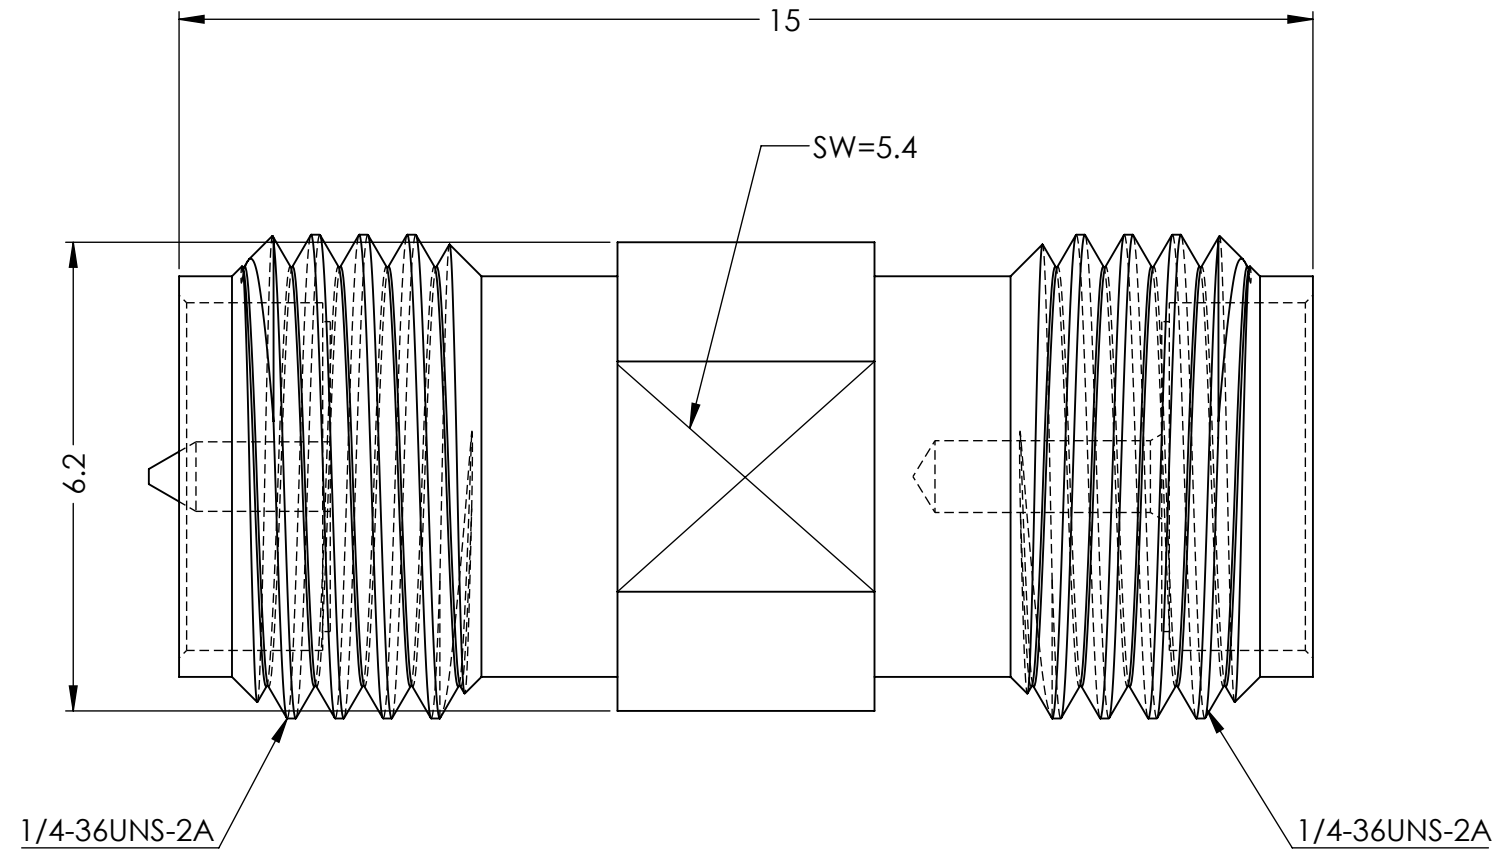

RP-SMA JACK TO SMA JACK ADAPTOR

NOTES:

- INTERFACE PER: MIL-STD-348, IEC 60169-15
- MATERIAL AND FINISHING:
 - CENTER CONDUCTOR: PHOSPHOR BRONZE, GOLD PLATING
 - INSULATORS: PTFE
 - BODY: BRASS, GOLD PLATING
- ELECTRICAL DATA:
 - IMPEDANCE: 50 OHMS
 - FREQUENCY: 0-6 GHz
 - VSWR: 1.25 MAX
 - PROOF VOLTAGE: 1500 VEFF
 - WORKING VOLTAGE: 500 VEFF

ITEM 174-00051-01 REVISION HISTORY			
REV	DESCRIPTION	DATE	BY
1	INITIAL RELEASE	2024-04-26	MP

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MAXTENA, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MAXTENA, INC IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:	NAME	DATE
DIMENSIONS ARE IN MM	DRAWN	MP 2024-04-26
TOLERANCES:	CHECKED	BO 2024-04-29
FRACTIONAL ±	ENG APPR.	AV 2024-04-29
ONE PLACE DECIMAL ± 1.0	MFG APPR.	
TWO PLACE DECIMAL ± .50	Q.A.	
INTERPRET GEOMETRIC TOLERANCING PER:	CAD MAINTAINED. CHANGES SHALL BE INCORPORATED BY THE DESIGN ACTIVITY.	
	DO NOT SCALE DRAWING	

MAXTENA, INC		
TITLE: 174-00051-01 MAD-01-13-RPSMA-JACK		
SIZE	DWG. NO.	REV
B	117-00782-01	A
CAGE CODE: 5KQH7	SCALE: NONE	SHEET 1 OF 1