

Part #: 100-00150-01

Description

The M1516HCT-GN is a high performance antenna designed for GPS and Glonass bands. The antenna is built on proprietary Maxtena Helicore® technology. This technology provides exceptional pattern control, polarization purity and high efficiency in a very compact form factor. The M1516HCT-GN is rated IP-67 when mounted for added protection. This product is designed for applications requiring high quality GPS and Glonass reception.



Parameter	Specification
Frequency	1575 MHz (GPS) 1602 MHz (Glonass)
Polarization	RHCP
Antenna Element Peak Gain	1.8 dBic (GPS) -1.7 dBic (Glonass)
Axial Ratio	0.2 dB (typical)
VSWR	1.5 (max)
Impedance	50 Ω
Operating temp.	from -30°C to 60°C
RF Connector	SMA male
Overall dimensions	135 mm (height) x 18.5 mm (diameter)
Weight	45 grams



Mechanical Specifications dimensions are in mm

Features

- · Very low axial ratio
- · IP-67 mounted
- · Ultra lightweight 45 grams
- Ground plane independent

Applications


- · Vehicle and fleet tracking
- · Military & security
- Asset tracking
- OII & gas industries
- Navigation devices
- Mining equipment
- LBS & M2M applications
- Handheld devices
- Law enforcement




Maxtena Inc. 7361 Calhoun Place, Suite 102 Rockville, MD 20855 1-877-629-8362 info@maxtena.com

www.maxtena.com


GPS RHCP Gain-Elevation cut

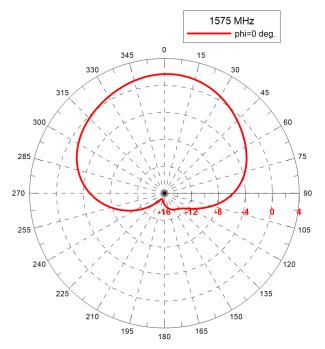


GPS RHCP Gain-Azimuth cut

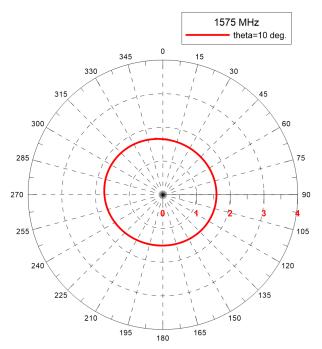

GPS Axial Ratio-Elevation cut

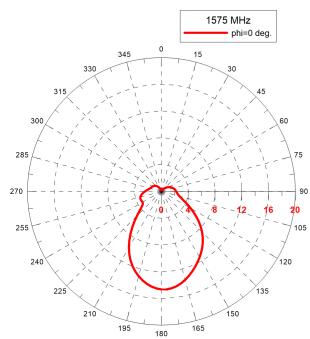

GPS Axial Ratio-Azimuth cut

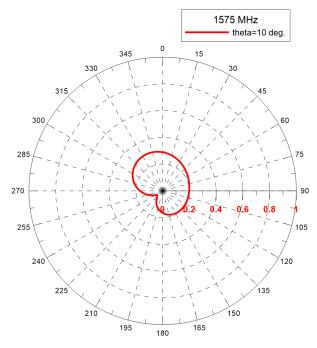





Maxtena Inc. 7361 Calhoun Place, Suite 102 Rockville, MD 20855 1-877-629-8362 info@maxtena.com

www.maxtena.com


Glonass RHCP Gain-Elevation cut

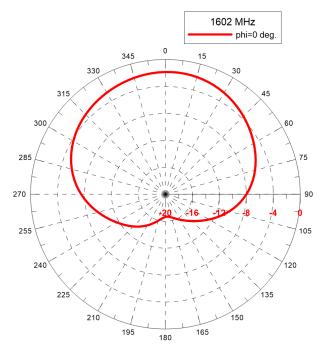


Glonass RHCP Gain-Azimuth cut

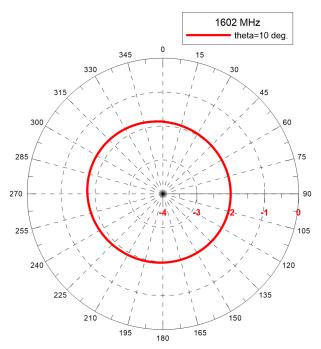

Glonass Axial Ratio-Elevation cut

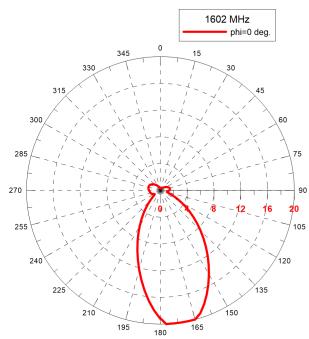


Glonass Axial Ratio-Azimuth cut

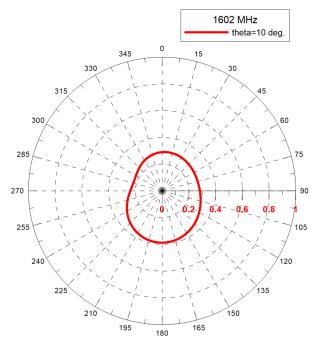



Maxtena Inc. 7361 Calhoun Place, Suite 102 Rockville, MD 20855 1-877-629-8362 info@maxtena.com

www.maxtena.com

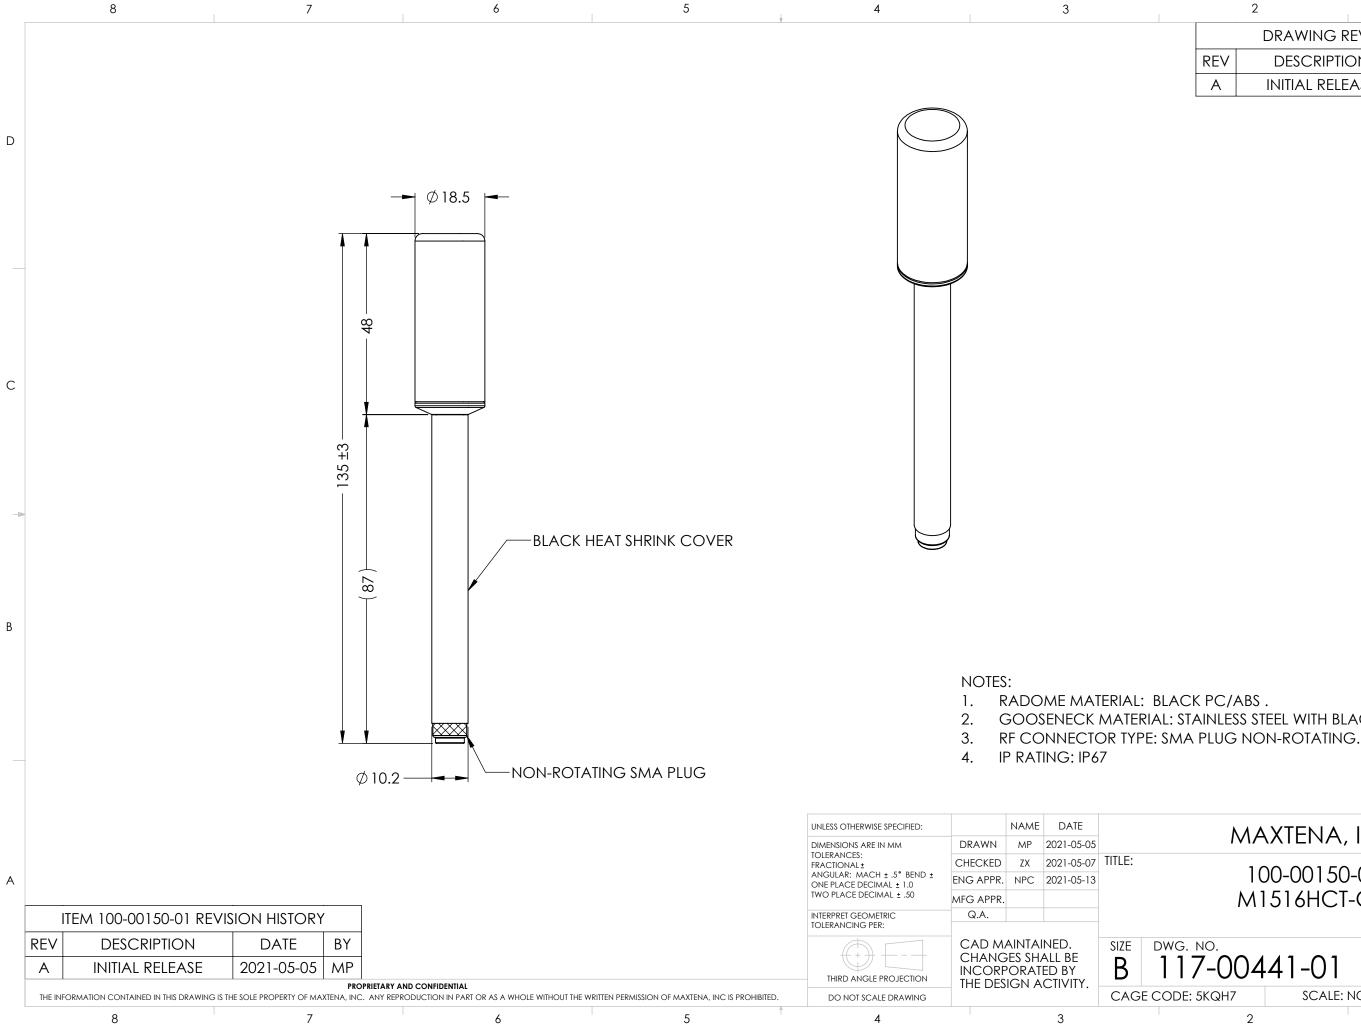

	2		1	
DRAWING REVISION HISTORY				
REV	DESCRIPTIC	ЛС	DATE	BY
Α	INITIAL RELE	ASE	2021-05-05	MP

D

С

А

GOOSENECK MATERIAL: STAINLESS STEEL WITH BLACK COATING.

MAXTENA, INC

100-00150-01 M1516HCT-GN

^{wg. NO.} 17-004	41-01		REV A
DDE: 5KQH7	scale: noni	E SHEET 1	OF 1
2		1	